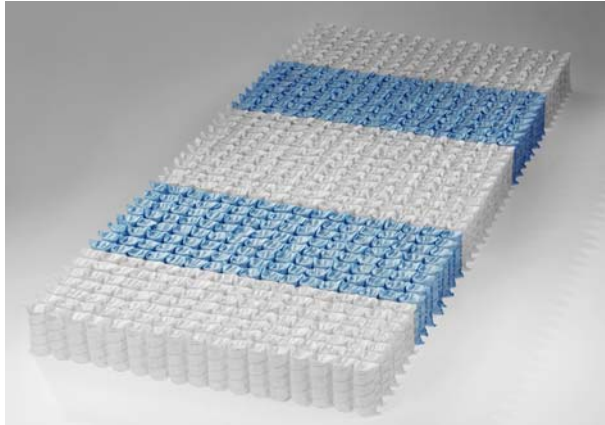


Type: Barrel shape

Version: PUNKTOFLAEX 500S

as of: 03/07


Materials used

- ➔ Steel wire for springs DIN EN 10270 – dimensions 1.4/1.5/1.6/1.8 mm (16 ¾, 16 ¼, 16, 15 gauge)
- ➔ Needle punched fibre: 80% Polyester / 20% Polypropylene

alternatively: 1 or 2 flat strip border frames 10x1.4 mm

Specification

No. of turns:	6 ½ or 7 ½	Shape of coils:	barrel
Coil diameter:	50 mm (2")	Core heights:	12/13/16/20 cm (4 ¾", 5", 6 ¼", 8")
Course of strands:	lengthwise or crosswise	Pockets:	u.s. welded
Connecting-System:	strands of springs are centrally glued using hot melt adhesive		

Standard-sizes and coil count

72,5x178 cm – 15x34=510 coils
 87x188,5 cm – 18x36=648 coils
 92x194 cm – 19x37=703 coils

131x188,5 cm – 27x36= 972 coils
 150x199 cm – 31x38=1178 coils
 189x198 cm – 39x38=1482 coils

Product Description

The pocket spring unit has a particularly complex form of springing, since each individual coil is worked into either a fabric or non-woven pocket. The pocket spring units are renowned for being extremely comfortable and quiet. All of Argo's spring units are manufactured using only the highest quality raw material.

Due to the central gluing system, all **Punktoflaex** units have an excellent point of elasticity. The entire family of Punktoflaex units are built around this system.

The **500s** model was developed to increase comfort and support by providing higher spring count. With over **970 individual pocket springs** per Double/Full mattress. The unit fulfils all-important criteria for the production of a high-quality mattress. AGRO also offer the unit with a Multi-Zoned option in either **3, 5 & 7 zones**.

Product features and advantages

- ➔ Very good point elasticity by over 970 springs in a Double/Full size mattress
- ➔ excellent support of the spinal column
- ➔ suitable for all adjustable beds
- ➔ high flexibility by exclusively central bonding
- ➔ particularly good body adjustment
- ➔ multi-zone design possible by using different wire gauges